

## NMR-02

NON-MAGNETIC AND NON-REFLECTIVE TRIPOD

The "non-magnetic and non-reflective" tripod NMR-02 allows to place sensors and optical repeater in every environment with no problem of interference, reflection, magnetic attraction or humidity. The tripod is built with non-metallic material, in order to be usable in anechoic chambers and MRI.


The NMR-02 is solid, suitable for all environments, extendable up to 3 m, lightweight and easy to carry. All these features make it a greatly innovative tripod for EMI-EMC, RF and EMF measurement.

Compliant with the IEC 61786 directive, where it is required to perform EMF low frequency measurements not affected by humidity.



**FIBERGLASS** lighter but stronger than wood and not affected by humidity

Industrial sites and outdoor, MRIs, anechoic chambers

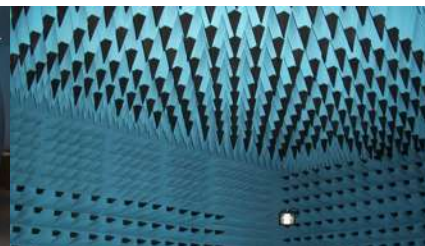

# APPLICATIONS

NMR-02 is used to place antennas (log periodic, biconical, horn, rod) and measuring instruments (electromagnetic field meter, low frequency sensor, shielding effectiveness meter) in environments where metal is not allowed.



Telescopic support and  
MPB/1/4 inch adapter



Telescopic legs with locking  
and non-slip feet

## TECHNICAL SPECIFICATIONS

### NMR-02 TRIPOD

Max height	3 m
Min adjustable height	0,7 m
Max payload	1 Kg (with telescopic tube open) 10 Kg (with telescopic tube closed)
Operating temperature	da -10°C a 50°C
Dimensions	1000 x 140 x 140 mm
Weight	2,8 Kg
Materials	FIBERGLASS tube PEEK bolts and nuts RUBBER feets DELFIN components non-metallic paint

Subjec to change without notice

## AVAILABLE OPTIONS

Shoulder bag

Mod. NMR-BAG

Block system for different types of antennas or meters

Mod. NMR-BLK

Accessory for horizontal, vertical and cross polarization

Mod. NMR-ARJ

All possible configurations and options in the Accessories datasheet